




GROUND FLOOR PLAN
Scale 1:100

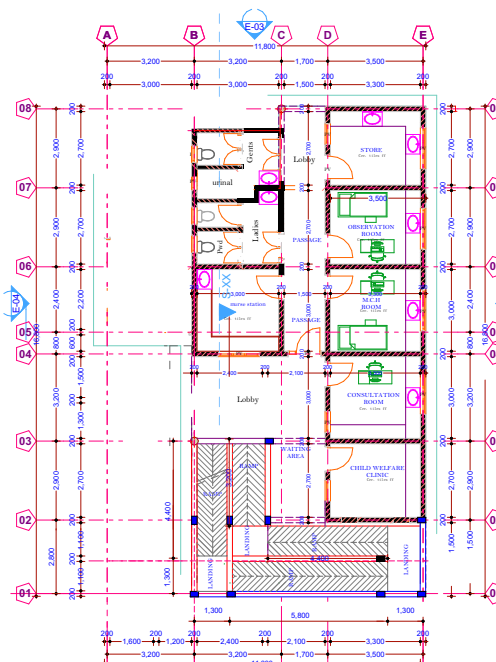


FIRST FLOOR PLAN
Scale 1:100

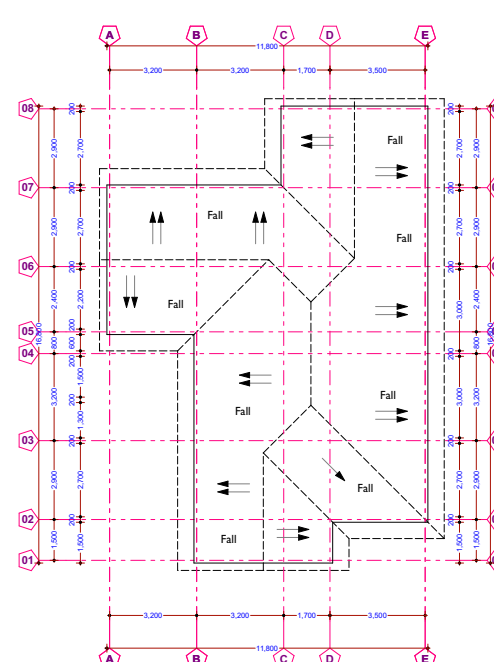


ROOF PLAN LAYOUT




ELEVATION -01
Scale 1:100

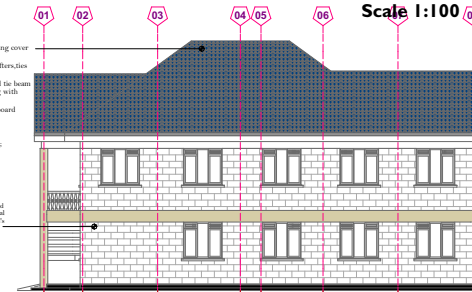



ELEVATION -02
Scale 1:100




ELEVATION -03
Scale 1:100

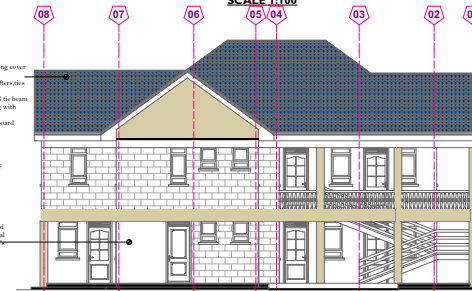

ELEVATION -04
Scale 1:100



BLOCK PLAN

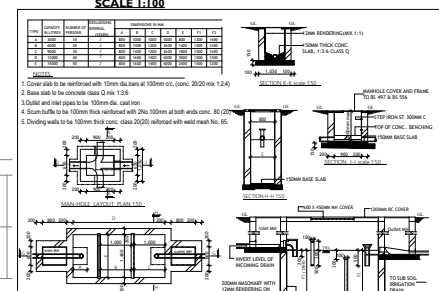

SECTION -XX
Scale 1:100

GENERAL NOTES

1. All dimensions are in millimeters unless otherwise stated.
2. All dimensions shall be confirmed on site and any discrepancies thereof shall be referred to architect before commencement of any works.
3. All dimensions must be read off and not scaled from the drawing.
4. p.v. to denote permanent ventilation and to be provided on all openings.
5. All structural works shall be subject to structural engineering details and site instructions.
6. All pipes passing under driveway and under buildings to be encased with 150mm thick concrete surround.
7. D.P.M. to denote damp proof membrane and to be applied under the ground floor slab to manufacturers specification.
8. D.P.C. shall imply damp proof membrane and shall be applied under all ground floor and parapet wall to manufacturers specifications.
9. Excavate all vegetable soil to a minimum depth of 350mm.
10. Reinforced concrete class 20 to all stip foundation footings and column bases to be subject to structural engineer's detail and depths to be determined on site.
11. All sanitary works to comply with M.O.H rules and regulations. The plumbing and foul drainage fittings to be subject to manufacturers specification and architects approval.
12. Liquid waste pipes and soil pipes to be in ducts and p.v.c. to have bends with cleaning eyes accessible from external.
13. Windows to be provided with precast sill, built in p.v. pelmet, timber board and burglar proofing all subject to architects approval.
14. Doors frames to be rebated and to be provided with architraves matching cornice and skirting. All subject to architect schedules.
15. All surface finishes to be subject to architects schedules in conjunction with the manufacturer's specification.
16. All fixtures and fittings shall be subject to architects details and approval before fixing.
17. Provide 300-mm pinth level from general ground level.
18. All walls shall be reinforced with hoop iron at alternate courses.
19. All electrical works and telecom cabling and conduits shall be done by registered persons and shall comply with by-laws in force.
20. Provide 1/2-hr fire resistance self close doors to all external entrances.
21. Provide 2x9-kg dry powder all purpose fire extinguishers to all entrances.
22. All works shall conform to the regulations of the National Environmental Management Authority (N.E.M.A.) in force.

WINDOW SCHEDULE.

S/No	INDEX	LENGTH	WIDTH	QTY.	TYPE	REMARKS
1.						
2.						
3.						
4.						

DOOR SCHEDULE.

1.						
2.						
3.						
4.						

AMENDMENTS

No	Date	Revision
1.		
2.		
3.		
4.		

Project: **PROPOSED SATELLITE DISPENSARY AT KAPENGNING PO BOX... ELDAMA RAVINE**

Consultant: _____

Approved by Architect: _____

Drawing title: _____

scale: _____ designed by: _____

date: Feb, 2024 drawn by: _____

checked by: _____

DRG NO. A.02